



DESCRIPTION


Professional Heavy duty Triple monitor with Waterproof housing for the outdoor duties(IP65)

Features

- # 7" Digital Color TFT-LCD (16:9)
- # Refined, but rugged mechanical design
- # Anti-glare protective window sheet with low color distortion
- # View image switching mode (Normal/Mirror)
- # Dimmer by CDS sensor (LCD brightness adjustment)
 - On
 - Off
 - Automatic
- # Free Voltage in Input Power
- # Built-in circuit protection chipset
- # LED buttons to improve visibility of the operation in dark or night
- # Automatic Parking Line display by Trigger On
 - Parking Guide Line Adjustable manually (Up & Down, Left & Right)
 - Parking Guide Line displaying CH selectable
 - Parking Guide Line display ON/OFF
- # Waterproof housing for the outdoor duties(IP65)
- # Sun-visor attachable (optional)

EXCLUSIVE FEATURES


KEY & FUNCTION

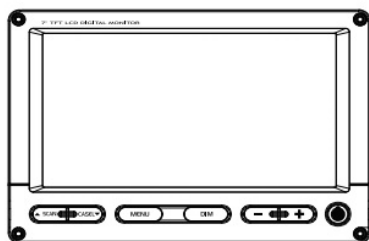

POWER




CAM1 - CAM2 - CAM3



CAM1 - CAM2 - CAM3



MENU : FUNCTION, PICTURE, CAMERA, CAMERA, CAMMODUS



AUTO LCD BRIGHTNESS SENSOR



MANUAL LCD BRIGHTNESS SENSOR



VOLUME DOWN & UP



OSD MENU

FUNCTION	
DIMMER	AUTO
LANGUAGE	ENGLISH
RESET	▶

FUNCTION

DIMMER
LANGUAGE
RESET

AUTO /OFF
ENGLISH/DEUTSCH/ITALIAL/FRANCAIS/ESPAÑOL/DUTCH/SUDMI/SWEDISH
>

PICTURE	
CONTRAST	50
BRIGHTNESS	50
COLOR	50
TINT	50
SHARPNESS	30

PICTURE

CONTRAST
BRIGHTNESS
COLOR
TINT
SHARPNESS

0 - 100
0 - 100
0 - 100
0 - 100
0 - 60

CAMERA	
CAM 1 SCAN	3
CAM 2 SCAN	3
CAM 3 SCAN	3
CAM 1 TRIG	3
CAM 2 TRIG	3
CAM 3 TRIG	3

CAMERA

CAM 1 SCAN
CAM 2 SCAN
CAM 3 SCAN
CAM 1 TRIG
CAM 2 TRIG
CAM 3 TRIG

0 - 9
0 - 9
0 - 9
0 - 9
0 - 9
0 - 9

CAMERA	
CAM 1 N/M	NORMAL
CAM 2 N/M	NORMAL
CAM 3 N/M	NORMAL
CAM 1 DIST	ON
CAM 2 DIST	OFF
CAM 3 DIST	OFF

CAMERA

CAM 1 N/M
CAM 2 N/M
CAM 3 N/M
CAM 1 DIST
CAM 2 DIST
CAM 3 DIST

NORMAL/MIRROR
NORMAL/MIRROR
NORMAL/MIRROR
ON/OFF (PARKING GUIDE LINE ON/OFF)
ON/OFF
ON/OFF


CAM/MODUS	
CAM 1	ON
CAM 2	ON
CAM 3	ON

CAM/MODUS

CAM 1
CAM 2
CAM 3

ON/OFF
ON/OFF
ON/OFF

PARKING GUIDE LINE

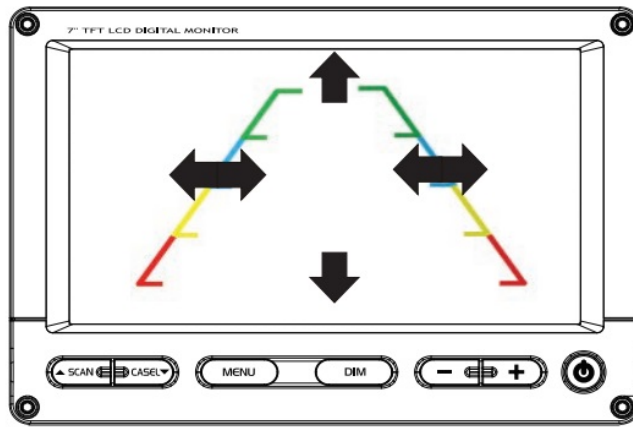

- PRESS "MENU" BUTTON.
- GO TO THE END OF THE LAST MENU(CAM/MODUS) AND THEN PRESS "MENU" ONCE AGAIN.
- PARKIGN GUIDE LINE IS DISPLAYED.
- SELECT A DESIRED LINE TO ADJUST; LEFT, RIGHT, UP OR DOWN BY "SCAN/CA.SEL" BUTTON.
- THE SELECTED LINE IS CHANGED INTO RED COLOR.
- ADJUST THE LINE BY "VOLUME" BUTTON.

NOTES

- We recommend that the installation will be performed by a qualified specialist
- Check also the other tabs for "Compatibility" - "Package contents" - "Product specifications"

LEGAL NOTICE

Please check before purchase if it is aloud to install this camera and it wont affect your MOT.

NAVcam
heavy duty cameras

COMPATIBILITY

Universal use
Only for rear installation

NOTES

-
- RCA output = male
 - CVBS signal is NTSC