



DESCRIPTION

Professional Heavy duty AHD Quad monitor
Support AHD720 & AHD1080 cameras, not support CVBS cameras


Features

- 7" Digital TFT monitor - 500cmd - 1024x600
- Refined, but rugged mechanical design
- Anti-glare protective window sheet with low color distortion
- View image switching mode (Normal/Mirror)
- Various display mode (full/split1/split2/triple-pip/quad)
- Dimmer by CDS sensor (LCD brightness adjustment)
- Free Voltage in Input Power
- Built-in circuit protection chipset
- LED buttons to improve visibility of the operation in dark or night
- Automatic Parking Line display by Trigger On
- CE-mark
- FCC-mark
- 2 Year warranty & Support

EXCLUSIVE MONITOR FEATURES

Buttons


Controle buttons on front

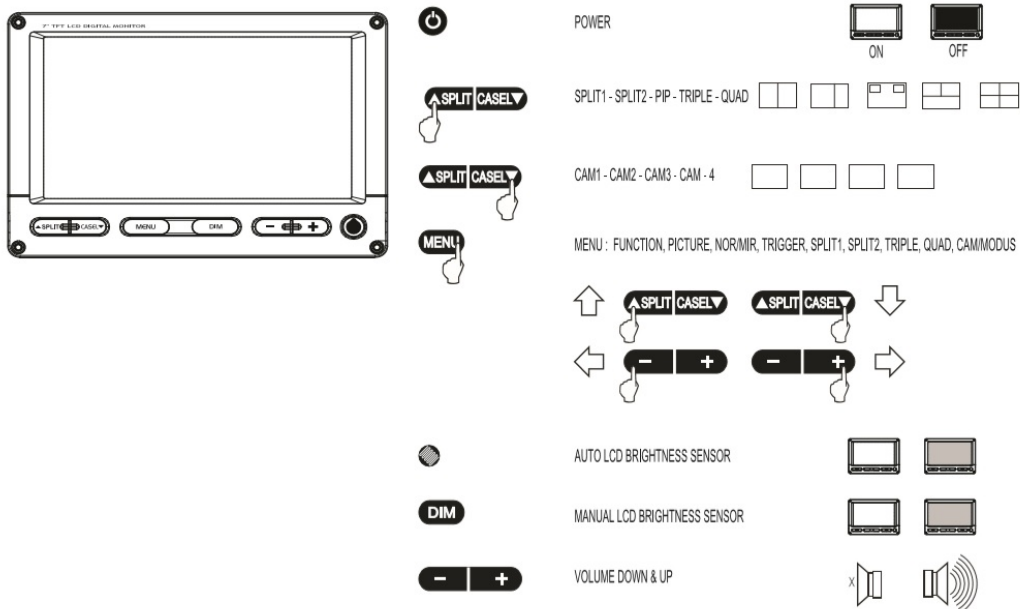

Guide Line

Automatic Parking Line display by Trigger On

- Parking Guide Line Adjustable manually (Up & Down, Left & Right)
- Parking Guide Line displaying CH selectable
- Parking Guide Line display ON/OFF
- Parking Guide Lines adjustable in menu

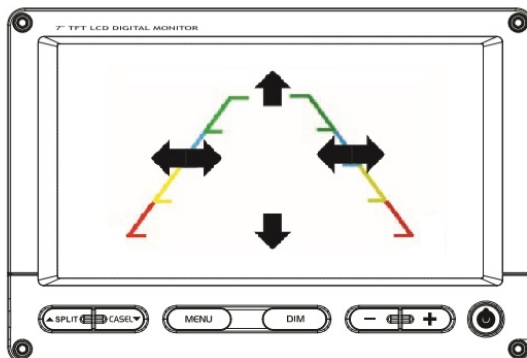

■ SETUP



OSD MENU


Via the OSD menu is it possible to adjust different settings:

MENU

FUNCTION LANGUAGE ENGLISH SYSTEM PAL DIMMER AUTO PAS ON RESET ►	FUNCTION	LANGUAGE	ENGLISH
		SYSTEM	PAL / NTSC
		DIMMER	OFF / AUTO
		PAS	ON / OFF (PARKING GUIDE LINE)
		RESET	►
PICTURE CONTRAST 50 BRIGHTNESS 50 COLOR 50 TINT 50	PICTURE	CONTRAST	0 - 100
		BRIGHTNESS	0 - 100
		COLOR	0 - 100
		TINT	0 - 100
NOR/MIR CA1 NORMAL CA2 NORMAL CA3 NORMAL CA4 NORMAL	NOR/MIR	CA 1	NORMAL / MIRROR
		CA 2	NORMAL / MIRROR
		CA 3	NORMAL / MIRROR
		CA 4	NORMAL / MIRROR
TRIGGER PAS TRIG 1 TRIG 1 CA1 TRIG 2 CA2 TRIG 3 CA3 TRIG 1 TIME 3 TRIG 2 TIME 3 TRIG 3 TIME 3	TRIGGER	PAS TRIG	CA1 / CA2 / CA3 / CA4 (PARKING GUIDE LINE TRIGGER SETUP)
		TRIG 1	CA1/CA2/CA3/CA4/SPLIT1/SPLIT2/PIP/TRIPLE/QUAD
		TRIG 2	CA1/CA2/CA3/CA4/SPLIT1/SPLIT2/PIP/TRIPLE/QUAD
		TRIG 3	CA1/CA2/CA3/CA4/SPLIT1/SPLIT2/PIP/TRIPLE/QUAD
		TRIG 1 TIME	0 - 9
		TRIG 2 TIME	0 - 9
		TRIG 3 TIME	0 - 9
SPLIT 1 SOURCE 1 CA1 SOURCE 2 CA2 AUDIO CA1	SPLIT1	SOURCE 1	CA1 / CA2 / CA3 / CA4
		SOURCE 2	CA1 / CA2 / CA3 / CA4
		AUDIO	CA1 / CA2 / CA3 / CA4
TACHO GRAPH TACHO SW OFF TACHO 5 TACHO TIME 5 FREQUENCY 67Hz	TACHO GRAPH	TACHO SW	ON/OFF
		TACHO	CA1/CA2/CA3/CA4/SPLIT1/SPLIT2/PIP/TRIPLE/QUAD
		TACHO TIME	0 - 9
		FREQUENCY	5 - 151
SPLIT 2 SOURCE 1 CA1 SOURCE 2 CA2 AUDIO CA1	SPLT2	SOURCE 1	CA1 / CA2 / CA3 / CA4
		SOURCE 2	CA1 / CA2 / CA3 / CA4
		AUDIO	CA1 / CA2 / CA3 / CA4
PIP SOURCE 1 CA1 SOURCE 2 CA2 SOURCE 3 CA3 AUDIO CA1	PIP	SOURCE 1	CA1 / CA2 / CA3 / CA4
		SOURCE 2	CA1 / CA2 / CA3 / CA4
		SOURCE 3	CA1 / CA2 / CA3 / CA4
		AUDIO	CA1 / CA2 / CA3 / CA4
TRIPLE SOURCE 1 CA1 SOURCE 2 CA2 SOURCE 3 CA3 AUDIO CA1	TRIPLE	SOURCE 1	CA1 / CA2 / CA3 / CA4
		SOURCE 2	CA1 / CA2 / CA3 / CA4
		SOURCE 3	CA1 / CA2 / CA3 / CA4
		AUDIO	CA1 / CA2 / CA3 / CA4
QUAD SOURCE 1 CA1 SOURCE 2 CA2 SOURCE 3 CA3 SOURCE 4 CA4 AUDIO CA1	QUAD	SOURCE 1	CA1 / CA2 / CA3 / CA4
		SOURCE 2	CA1 / CA2 / CA3 / CA4
		SOURCE 3	CA1 / CA2 / CA3 / CA4
		SOURCE 4	CA1 / CA2 / CA3 / CA4
		AUDIO	CA1 / CA2 / CA3 / CA4
CAM/MODUS CA 1 ON CA 2 ON CA 3 ON CA 4 ON SPLIT 1 ON SPLIT 2 ON PIP ON TRIPLE ON QUAD ON	CAM/MODUS	CA 1	ON / OFF
		CA 2	ON / OFF
		CA 3	ON / OFF
		CA 4	ON / OFF
		SPLIT 1	ON / OFF
		SPLIT 2	ON / OFF
		PIP	ON / OFF
		TRIPPLE	ON / OFF
		QUAD	ON / OFF


Trigger wire

Each camera input has its own trigger wire:

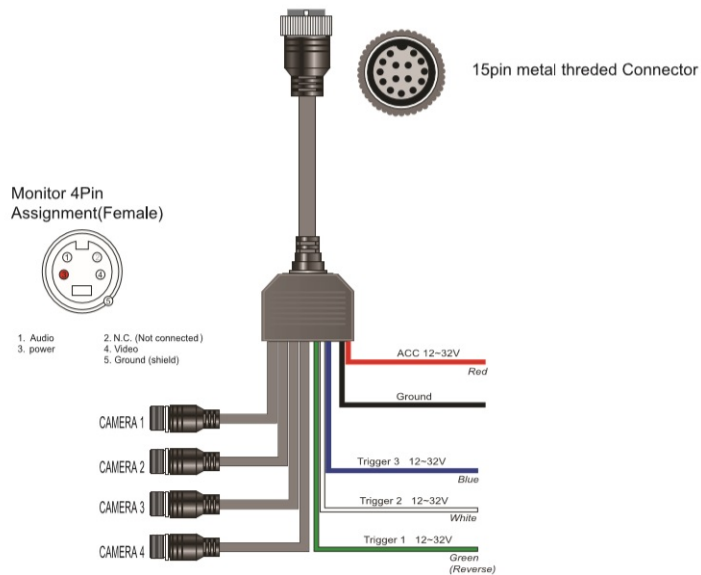

Sunviser

Included removeable sunvisor

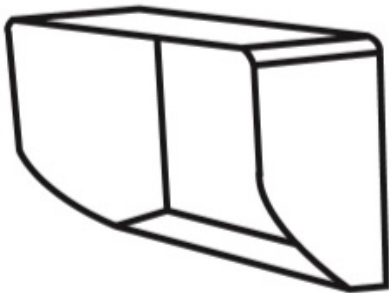

Metal screw lock

Water- & shock proof 4-pins mini din screw lock connector.



NOTES

- We recommend that the installation will be performed by a qualified specialist
- Check also the other tabs for "Compatibility" - "Package contents" - "Product specifications"

LEGAL NOTICE

Please check before purchase if it is aloud to install this camera and it wont affect your MOT.



COMPATIBILITY

Universal use
Only for rear installation

NOTES

- Camera input cable is metal screwlock. If you need a RCA input, please use our adapter CAM-HD-CONM
- CVBS signal: support PAL, SECAM & NTSC