

## **Heavy Duty Triple Monitor 7.0";400cd; PAL/NTSC; 12-32V**

**Art. Nr:** TFT-HD-TR70

---



### **DESCRIPTION**

---

Professional Heavy duty Triple monitor.


### **Features**

- # 7" Digital Color TFT-LCD (16:9)
- # Refined, but rugged mechanical design
- # Anti-glare protective window sheet with low color distortion
- # View image switching mode (Normal/Mirror)
- # Dimmer by CDS sensor (LCD brightness adjustment)
  - On
  - Off
  - Automatic
- # Free Voltage in Input Power
- # Built-in circuit protection chipset
- # LED buttons to improve visibility of the operation in dark or night
- # Automatic Parking Line display by Trigger On
  - Parking Guide Line Adjustable manually (Up & Down, Left & Right)
  - Parking Guide Line displaying CH selectable
  - Parking Guide Line display ON/OFF
- # Sun-visor attachable (optional)

### **EXCLUSIVE FEATURES**

---

### **KEY & FUNCTION**

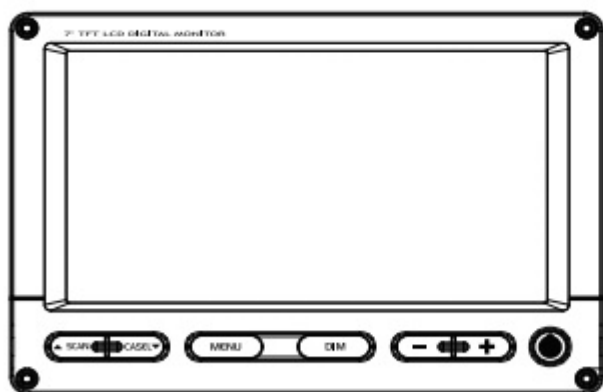


POWER



ON



OFF



CAM1 - CAM2 - CAM3



CAM1 - CAM2 - CAM3



MENU : FUNCTION, PICTURE, CAMERA, CAMERA, CAM/MODUS



AUTO LCD BRIGHTNESS SENSOR



MANUAL LCD BRIGHTNESS SENSOR



VOLUME DOWN & UP



## OSD MENU

FUNCTION	
DIMMER	AUTO
LANGUAGE	ENGLISH
RESET	▶

FUNCTION

DIMMER  
LANGUAGE  
RESET

AUTO /OFF  
ENGLISH/DEUTSCH/ITALIAL/FRANCAIS/ESPAÑON/DUTCH/SU  
>

PICTURE	
CONTRAST	50
BRIGHTNESS	50
COLOR	50
TINT	50
SHARPNESS	30

PICTURE

CONTRAST 0 - 100  
BRIGHTNESS 0 - 100  
COLOR 0 - 100  
TINT 0 - 100  
SHARPNESS 0 - 60

CAMERA	
CAM 1 SCAN	3
CAM 2 SCAN	3
CAM 3 SCAN	3
CAM 1 TRIG	3
CAM 2 TRIG	3
CAM 3 TRIG	3

CAMERA

CAM 1 SCAN 0 - 9  
CAM 2 SCAN 0 - 9  
CAM 3 SCAN 0 - 9  
CAM 1 TRIG 0 - 9  
CAM 2 TRIG 0 - 9  
CAM 3 TRIG 0 - 9

CAMERA	
CAM 1 N/M	NORMAL
CAM 2 N/M	NORMAL
CAM 3 N/M	NORMAL
CAM 1 DIST	ON
CAM 2 DIST	OFF
CAM 3 DIST	OFF

CAMERA


CAM 1 N/M NORMAL/MIRROR  
CAM 2 N/M NORMAL/MIRROR  
CAM 3 N/M NORMAL/MIRROR  
CAM 1 DIST ON/OFF (**PARKING GUIDE LINE ON/OFF**)  
CAM 2 DIST ON/OFF  
CAM 3 DIST ON/OFF

CAM/MODUS	
CAM 1	ON
CAM 2	ON
CAM 3	ON

CAM/MODUS

CAM 1 ON/OFF  
CAM 2 ON/OFF  
CAM 3 ON/OFF

## PARKING GUIDE LINE

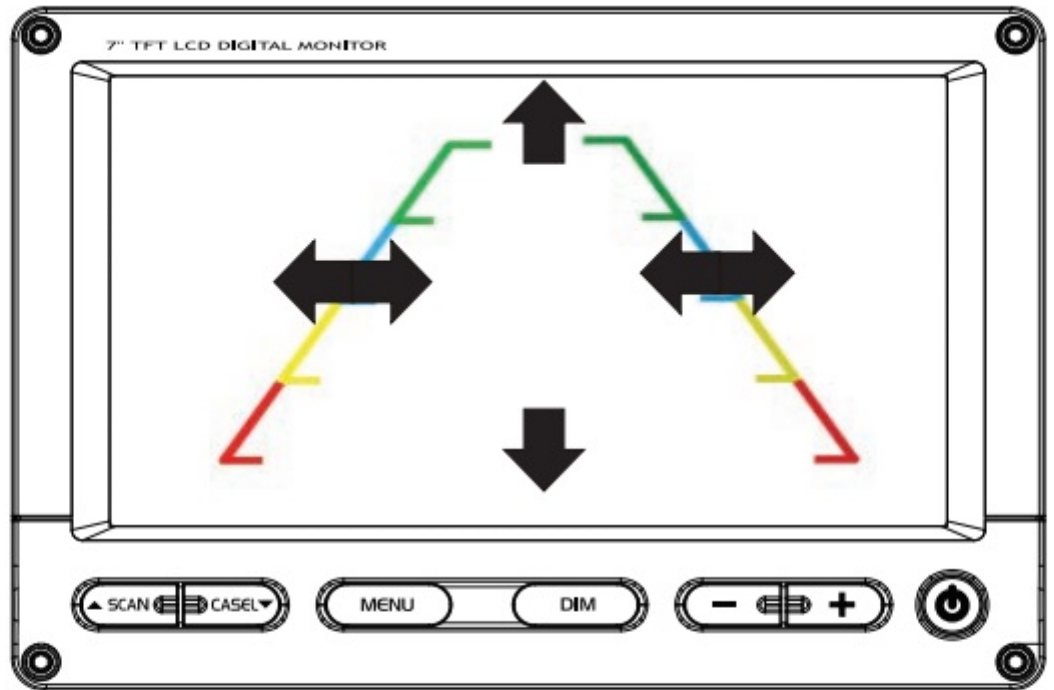

- PRESS "MENU" BUTTON.
- GO TO THE END OF THE LAST MENU(CAM/MODUS) AND THEN PRESS "MENU" ONCE AGAIN.
- PARKIGN GUIDE LINE IS DISPLAYED.
- SELECT A DESIRED LINE TO ADJUST; LEFT, RIGHT, UP OR DOWN BY "SCAN/CA.SEL" BUTTON.
- THE SELECTED LINE IS CHANGED INTO RED COLOR.
- ADJUST THE LINE BY "VOLUME" BUTTON.

## NOTES

---

- We recommend that the installation will be performed by a qualified specialist
- Check also the other tabs for "Compatibility" - "Package contents" - "Product specifications"

## LEGAL NOTICE

---

Please check before purchase if it is aloud to install this camera and it wont affect your MOT.



## COMPATIBILITY

---

Universal use

Only for rear installation

## NOTES

---

- RCA output = male
- CVBS signal is NTSC