


Heavy duty mini bracket HD camera; front/rear; 1280*960 MSL connector (NTSC)

Art. Nr: CAM-HD-Q2MD

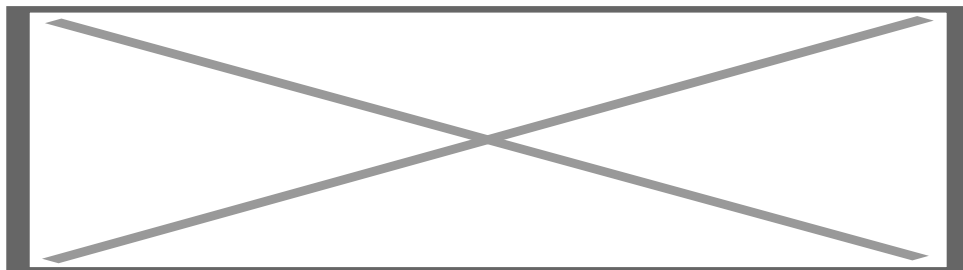

DESCRIPTION

Heavy duty HD mini substructure (vertical) & top (horizontal) mounting camera

Features

- 1/3" SONY CMOS HD Color Sensor
- Vibration & impact resistant housing
- IP69K Waterproof rating
- 150 degrees lens
- WDR (Wide Dynamic Range)
- High End Night View (0.03Lux) without LEDs
- Anti-glare & ghost
- Voltage range (10V-24V)
- Extreme Temp. Durability
 - Operating: -30°C ~ 60°C
 - Storing Temp. : -40°C ~ 80°C
- 4-pins Mini connector to RCA
- Front & rear mounting wire
- CE-mark
- FCC-mark
- 2 Year warranty & Support


EXCLUSIVE CAMERA FEATURES

SONY CCD

High End 1/3" SONY CMOS HD Color Sensor with 1280*960 resolution

Front & Rear mounting

Front & Rear mounting wire

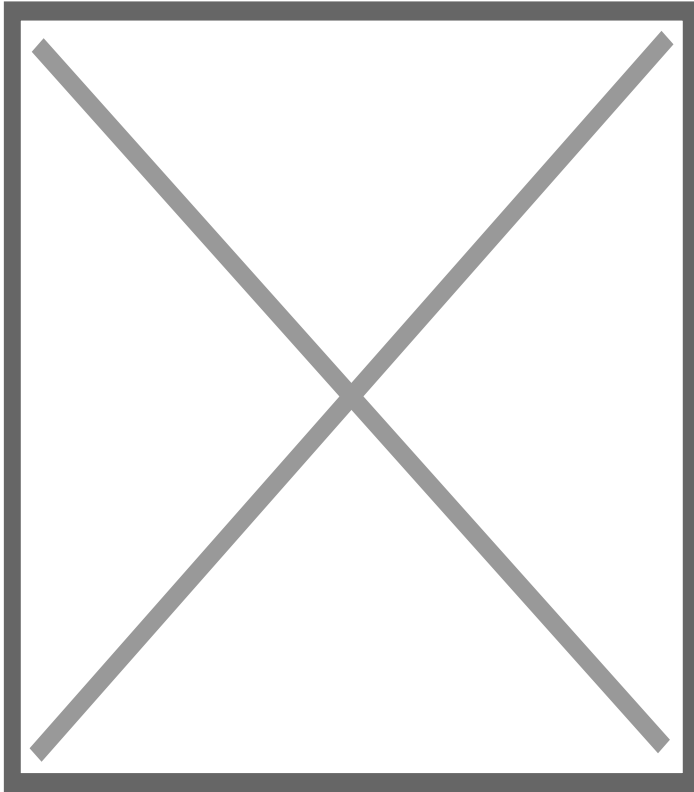

Ignition Power proof (+15)

It is possible to connect the powersupply to an ignition feed (+15), because we use the highest quality camera.


In this way you are able to watch the camera also in DRIVE gear or via manual selection.

NOTES

- We recommend that the installation will be performed by a qualified specialist
- Check also the other tabs for "Compatibility" - "Package contents" - "Product specifications"

LEGAL NOTICE

Please check before purchase if it is aloud to install this camera and it wont affect your MOT.

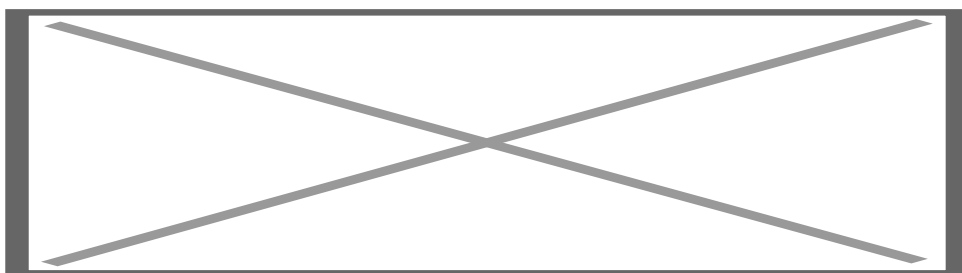

COMPATIBILITY

Universal use

Rear & Front installation

NOTES

- RCA output = male
- CVBS signal is NTSC